





**QUALITY. VALUE. CUSTOMISED SOLUTIONS** 





(M) sales@dassmetal.com

( Dass Metal Products 370 New Enterprise Way, Vaughan, ON, L4H OS3

Let's socialize





(905) 677 0456





Certified By


# STEEL STUD & TRACK FOR DRYWALL FRAMING

Designed and Engineered Products for all Lightweight and Heavy Steel Framing Applications

www.dassmetal.com



Dass Metal Products facility is located at 370 New Enterprise Way, Woodbridge, ON Canada. Our eco-friendly facility is over 200,000 square feet. We manufacture a complete line of steel studs, track and drywall accessories for interior and exterior wall framing. All Dass Metal Products are designed and engineered to exceed the requisite standard codes. We provide technical assistance and design capabilities to meet the requirements of any project. Our philosophy is to provide the best quality, value and customized solutions for our consumers. All custom sizes and lengths are available.

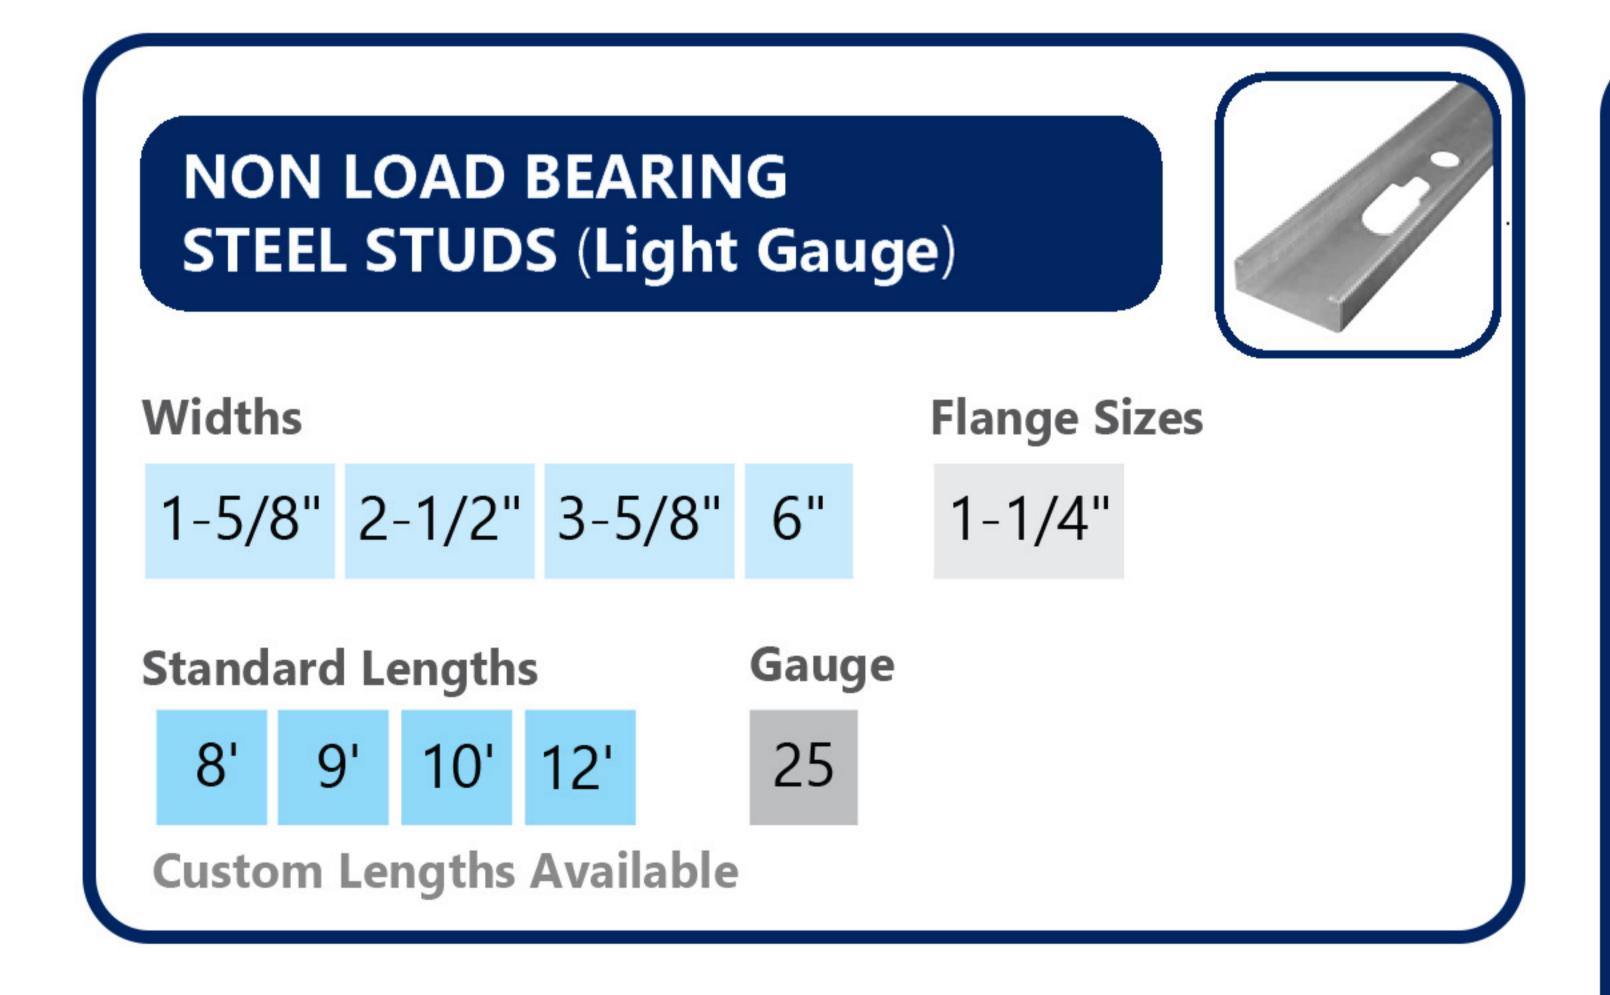



Structural Track is manufactured in various widths and I to accommodate your building design.

Flange Size

1-1/4"

1-5/8" 2- 1/2" 3-5/8" 4" 6" 8" 10" 12" 14"

25 20 18 16 14 12

## LOAD BEARING STUD FRAMING SYSTEM (Heavy Gauge)

Load bearing steel studs are designed for curtain walls, interior & exterior walls, floor and roof joist assemblies. They are designed and engineered for both wind and axial load bearing applications.

1-5/8" 2- 1/2" 3-5/8" 4" 6" 8" 10" 12" 14"

Any Length

Flange Size 1-1/4" 1-5/8" 2" 2-1/2" 3"

**Custom Lengths Available** 

## SLOTTED DEFLECTION TRACK


Flange Size 2- 1/2" 3-5/8" 4" 6" 8" 10" 12" 14" 2-1/2"

Length

25 20 18 16 14 12

**Custom Lengths Available** 

### **DEEP TRACK**

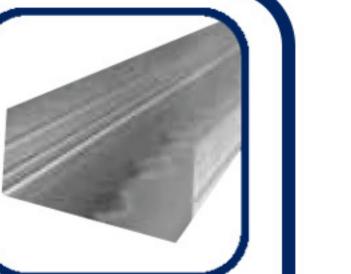

Flange Size

2" 2-1/2" 3"

Installing the Dass Deep track easily allows to accommodate for deflection.

1-5/8" 2- 1/2" 3-5/8" 4" 6"

8" 10" 12" 14" Length Gauge

25 20 18 16 14 12

### BRIDGING / CARRYING CHANNEL



Dass bridging channel is used to stabilize walls by stiffening them and preventing torsional buckling of the steel stud

## RESILIENT CHANNEL



DASS resilient channel significantly improves STC ratings when applied to walls or ceilings.

**Custom Lengths Available** 

### WINDBRACE



**Custom Lengths Available** 

both inside and outside.

### **FLAT STRIPS**



for fastening of handrail, cabinets,

Custom widths/ **Lenghts Available** 

### **U-FLEX TRACK**



Used when curved profile is needed

2- 1/2" 3-5/8" 6

Flange Size Length Gauge 8' 25 20

### **FURRING CHANNEL**



Furring channel is used to provide a means to connect your wall finish (drywall, siding, etc.) to the structure behind it.

Furring Channel Length

**Custom Lengths Available** 

### . - TRACK



Dass L-track are available in a variety of profiles and gauges to address any application requirements.

1-1/4" x 1-1/4" 1-1/2" x 1-1/2" 1" x 2" 2" x 2" 3" x 3"

25 20 18 16 14 12

**Custom Profile & Lengths Available** 

### **Z-BAR**



interior and exterior application

Other sizes and thickness available upon request

2" 2-1/2" 3" 3-1/2" 4" 4-1/2" 5" 5-1/2" 6"

Flange Size

1" 1-1/4" 1-1/2" 1-3/4" 2" 3"

25 20 18 16 14 12

Custom widths/Lenghts Available

### www.dassmetal.com



### SPECIAL PROFILES

25 20 18 16 14 12

90°/ 130° CORNERBEAD

after the application of compound.

Special profiles and custom brake shapes available upon request. An extensive selection of thickness, shapes, and

DASS cornerbead are easily fastened to drywall with nails or

screws, protecting corners and leaving a crisp and clean finish



of drywall edges. The 1-1/4" leg is knurled with holes for the application of compound to provide a smooth finish.

L TRIM



J trim Provides edge protection against window and door openings, and where wallboard butts against concrete or other materials used with drywall.

2-1/2" 4" 6"

SHAFTWALL / CH STUD

10' 12' 14' CUSTOM



Used in shafts containing elevators, ducts, piping, air shafts and similar construction applications.

to allow for building structure deflection at the top of

the wall, can also be used for non-load bearing

## DEFLECTION SIDE CLIP



allow for building structure deflection at the top of the wall

ALL STUDS, TRACKS AND DRYWALL ACCESSORIES







J-TRACK

### **Custom Lengths Available**

J Track is used at the floor and ceiling in shaftwall assemblies 1/2" type c or 5/8" type X gypsum board.

## WEBSLIDE CLIP

it accommodates stand off situations where required.

CUSTOM LENGTH AND SIZES ARE AVAILABLE FOR